


WORKING SAFELY WITH STEPLADDERS AND LADDERS

CONDITIONS FOR USING STEPLADDERS AND LADDERS

STEPLADDER | LADDER

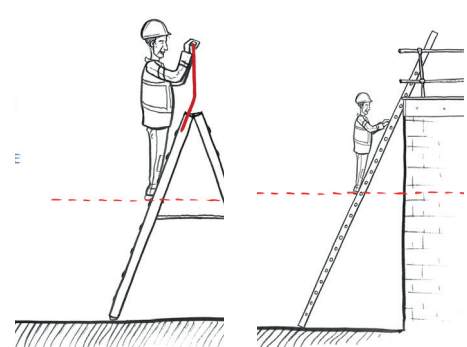


STANDING HEIGHT
MAX. 2,5 METRES | MAX. 5 METRES

STEPLADDER | LADDER




**TOTAL TIME ON LADDER
PER PROJECT**
6 HOURS | 4 HOURS

STEPLADDER | LADDER

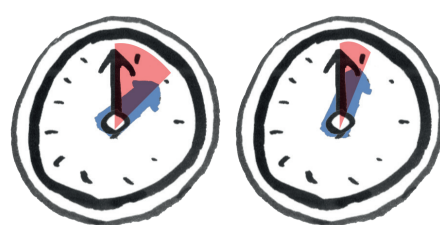


**INDIVIDUAL TIME ON LADDER
PER DAY**
2 HOURS | 1 HOURS

STEPLADDER | LADDER

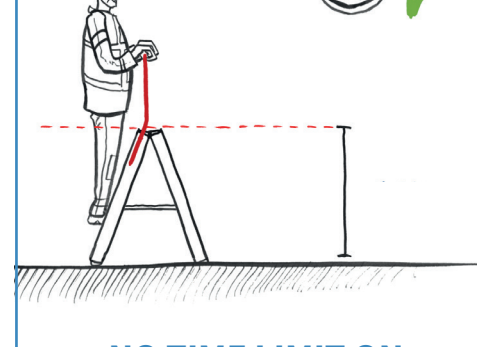


**NO TIME LIMIT ON
STEPLADDERS OF 1 METRE
OR LOWER**


STEPLADDER | LADDER

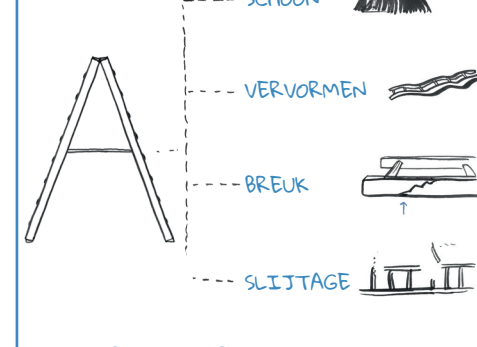


**CARRY OUT AN LMRA
(LAST-MINUTE RISK ANALYSIS)
BEFORE USE**

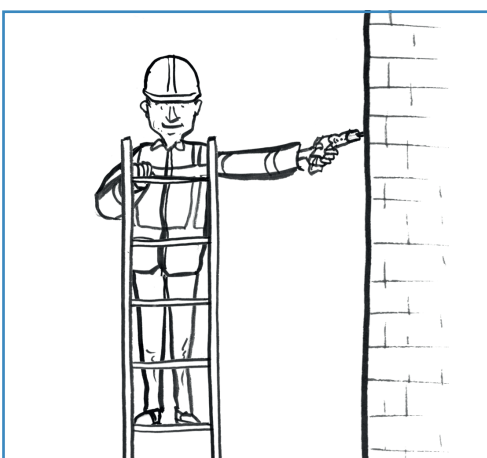


FORCE EXERTION
MAX. 5 KG

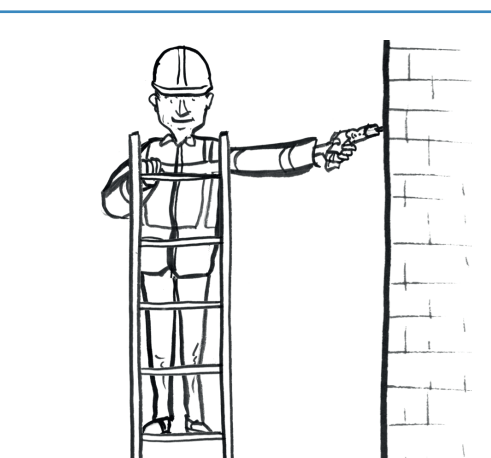


RANGE
MAX. 1 ARM LENGTH

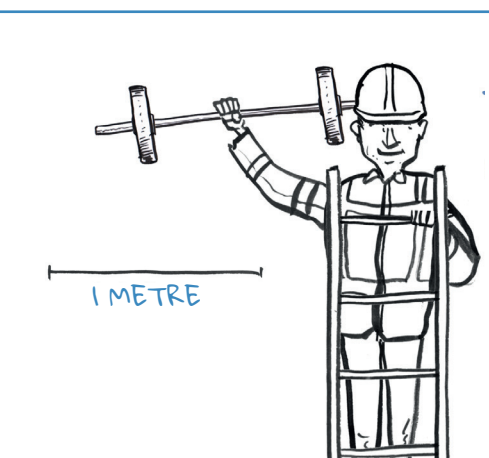


OBJECTS TO BE LIFTED
MAX. 10 KG AND MAX. 1 METRE

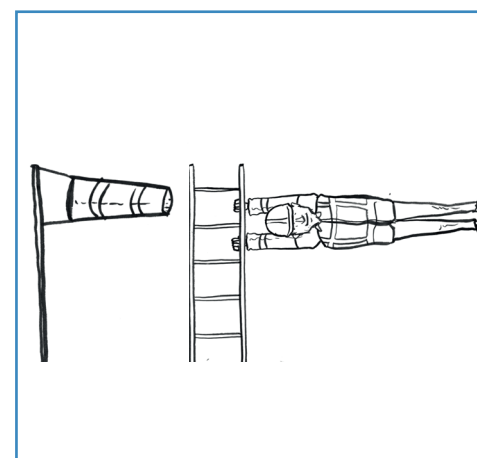


**WIND FORCE UP TO 6 BF
AND NO SLIPPERINESS**

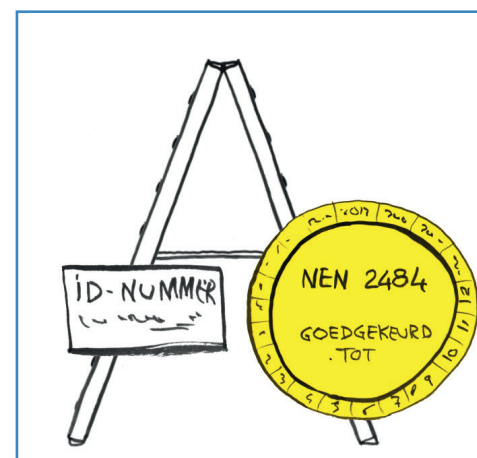


**DEMONSTRABLY INSPECTED
EACH YEAR**

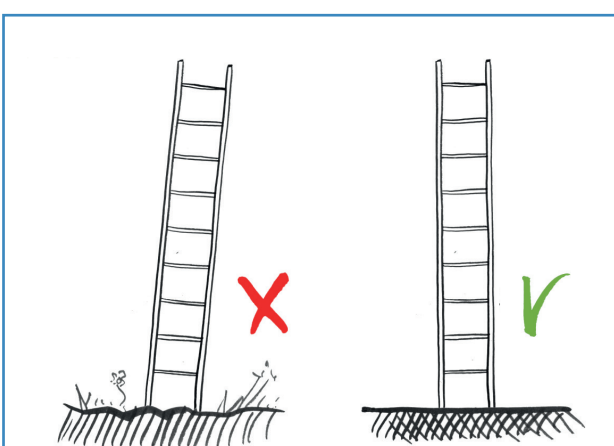


**ENSURE THAT THE SURFACE
IS STABLE**

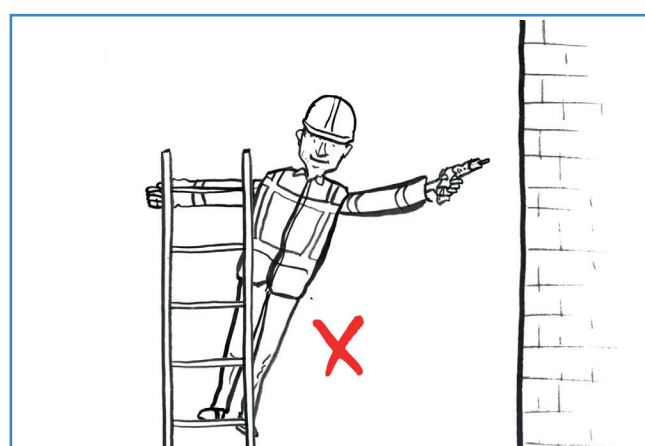

**KEEP NAVEL BETWEEN
THE UPRIGHTS**

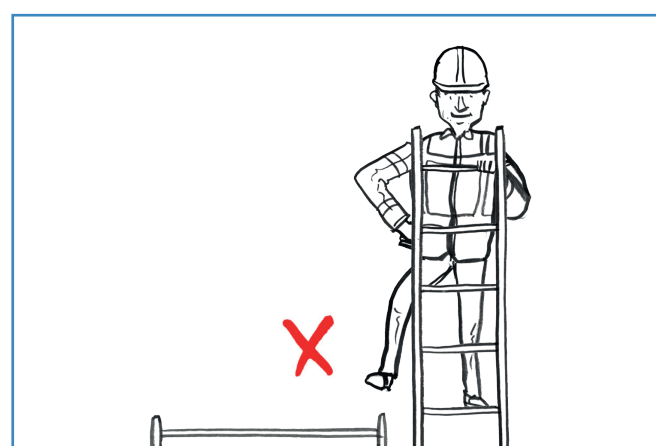


**DO NOT USE THE STEPLADDER
TO WALK ACROSS**

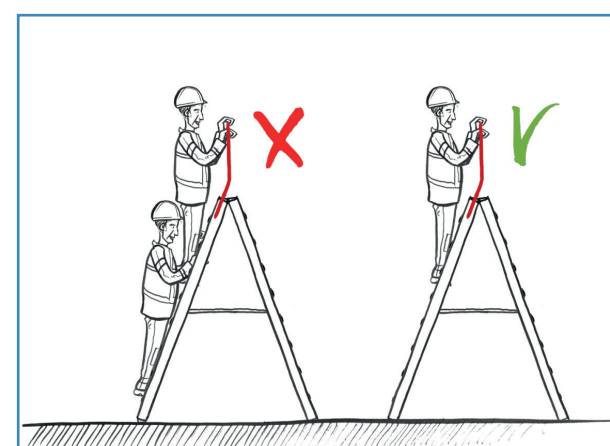


MAX. 1 PERSON


WHEN USING LADDER

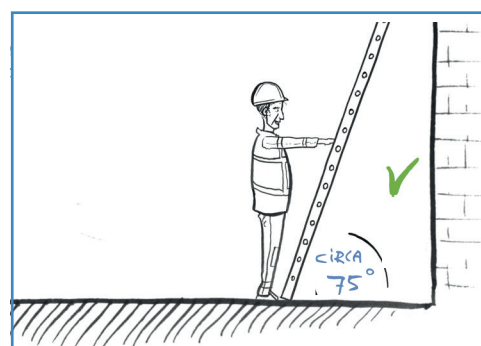


**PLACE THE LADDER AT
THE RIGHT ANGLE**

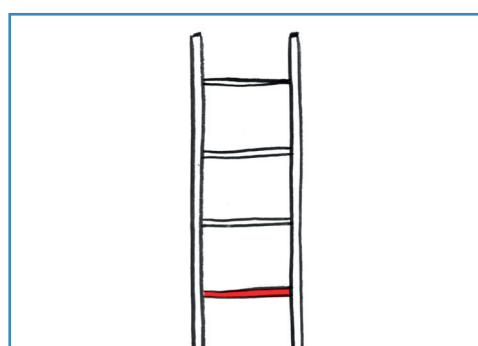

**DO NOT STAND ON
THE TOP STEP**

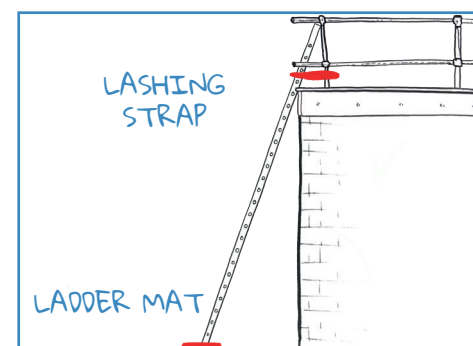

**SECURE LADDER AT
TOP AND BOTTOM**

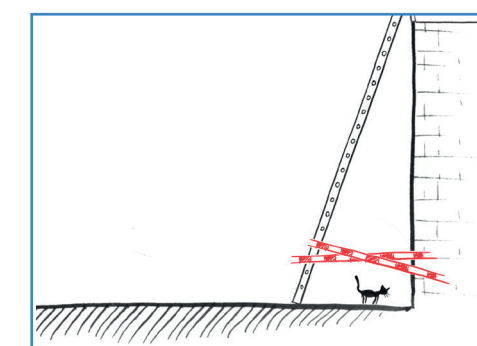


**DIVERT WALKING ROUTE
NEAR LADDER**

WHEN USING STEPLADDER

SUPPORT

Any stepladder with a wider standing area must have a support 60 cm above the highest standing area. This can be a protruding bar or a bracket.

If the stepladder does not have a wider standing area, do not climb higher than the third step from the top.

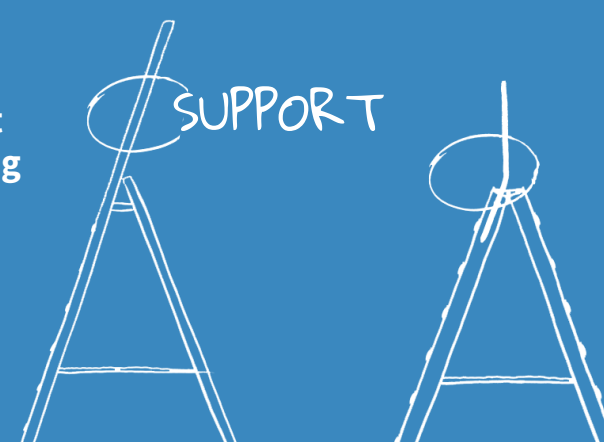

BEKIJK DE
INSTRUCTIEFILM

WWW.VOLKERWESSELS.COM/
VEILIGHEID/TRAPPEN_EN_LADDERS